

OFFICE OF THE MARION COUNTY SURVEYOR

SECTION RECORD CORNER

SECTION 13 TOWNSHIP 15 RANGE 4

DATE: 10-31-02 8-8-07

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison


METHOD OF ESTABLISHMENT: County: 2-17-02

IN. S.P.C. E ZONE NAD '83

NAME: 15041306

N: 499486.0000(m)

E: 69205.5830(m)

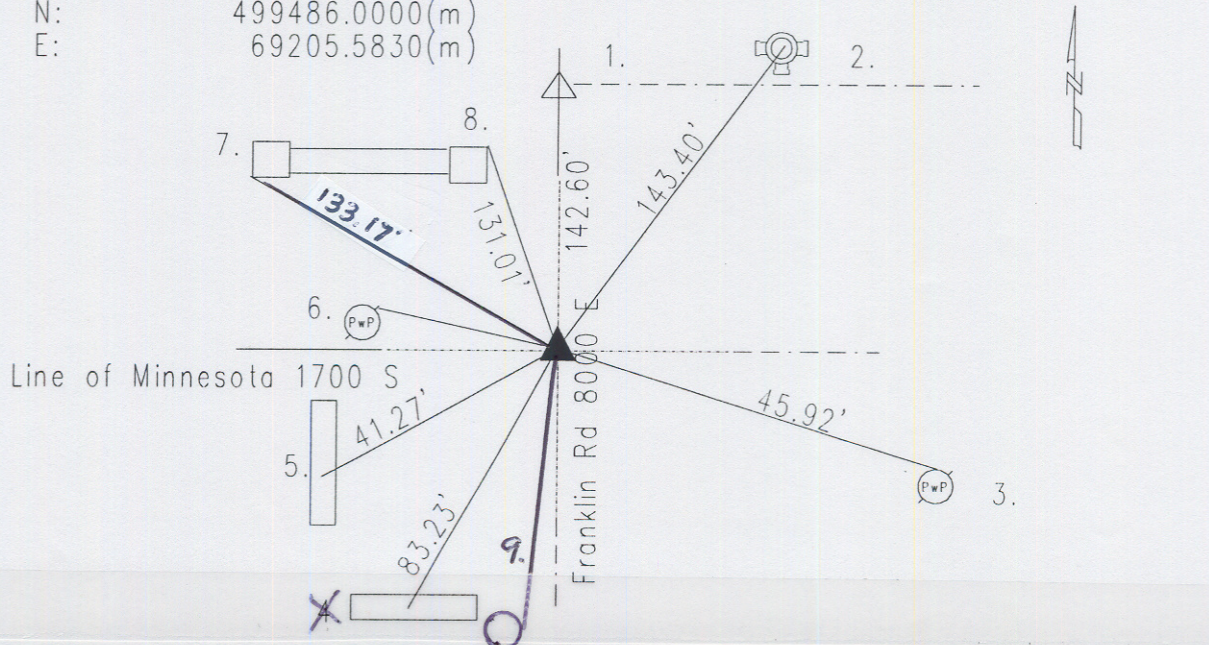

Corner originally set as a post in 1820 by John Hendricks with the following witnesses: 18" beech bearing south 8 degrees, thence east 10 links; and a 15" dogwood bearing north 8 degrees, thence west 12 links. (M.C.Atlas p. 10) A survey by D.B. Fatout on May 30, 1853 indicates no stone but the following witnesses: 20" beech bearing north 74.50 degrees, thence east 56.50 links; and a 16" beech bearing south 77.50 degrees, thence east 39.50 links. (Warren Legal Book p. 20) Corner referenced by GWS on 7/18/63 and called an iron pin. Corner referenced by McIand and called a bolt over stone. Corner referenced by McConahay on 8/30/74 and called a hex bolt. Corner referenced by Cleveland on 6/14/85 and called a R.R.spike set. Corner referenced by Gries on 12/2/88 and called a hex bolt. Corner referenced by Wilcoxon on 7/31/96 and called a hex bolt. Corner referenced by Wilcoxon on 2/17/02 and called a P.K.nail. Corner excavated by Wilcoxon on 10/26/02 and a hex bolt and steel pins were found side by side 6" down. No stone was found. A #205 cast iron Harrison monument was set in position as the corner.

15041306

REF.	DISTANCE	DESCRIPTION
1.	142.60'	Due N to Harrison monument W Q 18-15-5
2.	143.40'	Top nut of fire hydrant
3.	45.92'	Mag nail w/brass washer NW PwP#166-620A 8"up
4.	83.23'	Cut 'x' center headwall
5.	41.27'	Cut 'x' center headwall
6.	18.61'	Mag nail w/brass washer N PwP#33-619 A 6"up
7.	133.17'	SW corner of brick column
8.	131.01'	NE corner of brick column
9.	76.49'	Mag nail w/bw E PwP#445-620